



嘉捷實業股份有限公司
JU-JET ELECTRONICS CO., LTD.
台北縣汐止市大同路三段 204 號 4F-1

4F-1, 204, SEC 3, TA TUNG RD.,
HSI-CHIH, TAIPEI HSIEN,
TAIWAN, R.O.C.


TEL: 886-2-8647-2998

FAX: 886-8647-2997


E-Mail: jujet@eztest.com.tw

◎JET-5493E compare with JET-5493S


JET-5493E has Long Ear

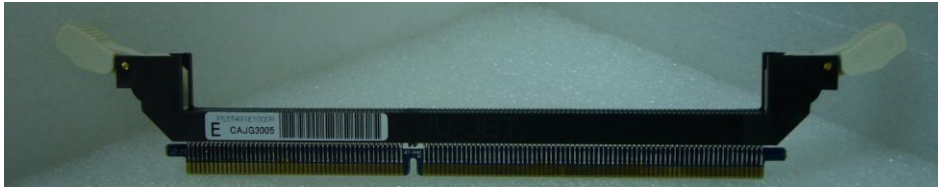

JET-5493S has Short Ear

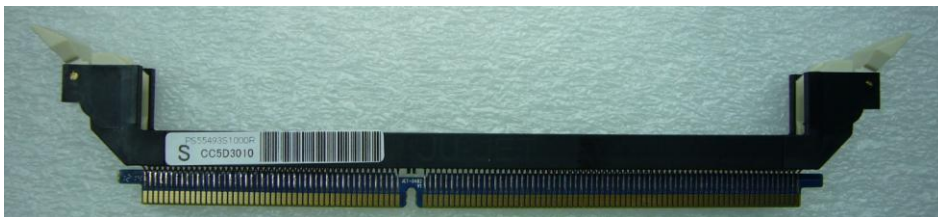


Their difference as picture blow :

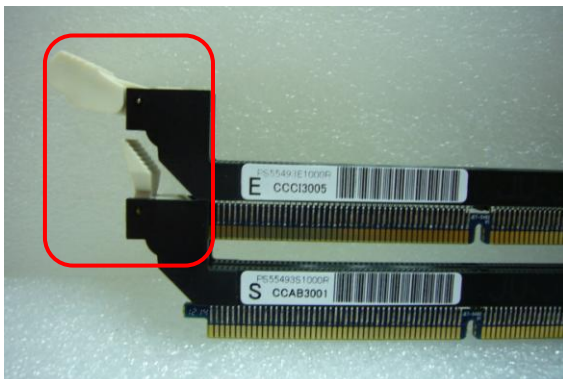

When need to use JET-5493S ?

Ans :if a Server board has any obstructer nearby RAM Socket.

See picture as blow:

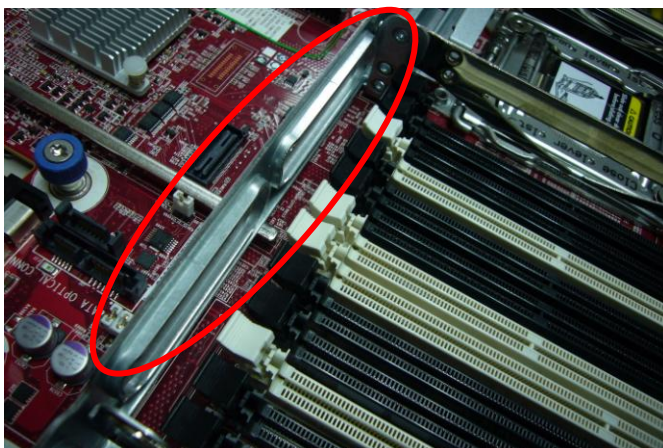



嘉捷實業股份有限公司
JU-JET ELECTRONICS CO., LTD.
台北縣汐止市大同路三段 204 號 4F-1

4F-1, 204, SEC 3, TA TUNG RD.,
HSI-CHIH, TAIPEI HSIEN,
TAIWAN, R.O.C.

TEL: 886-2-8647-2998


FAX: 886-8647-2997

E-Mail: jujet@eztest.com.tw



Feature :

JET-5493E only for a server board without any obstrucater nearby RAM Socket. Long ear of socket design for flexible use.

If your server board like this picture as blow, please to choose JET-5493S.

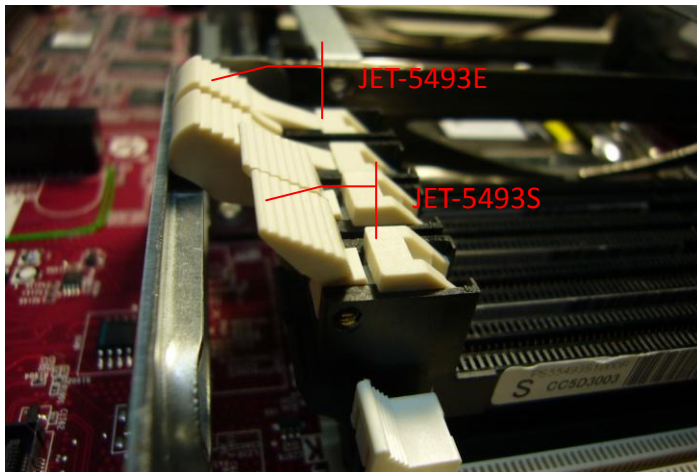

A Server board without any obstrucater nearby RAM area, and therefore can use JET-5493E and JET-5493S.

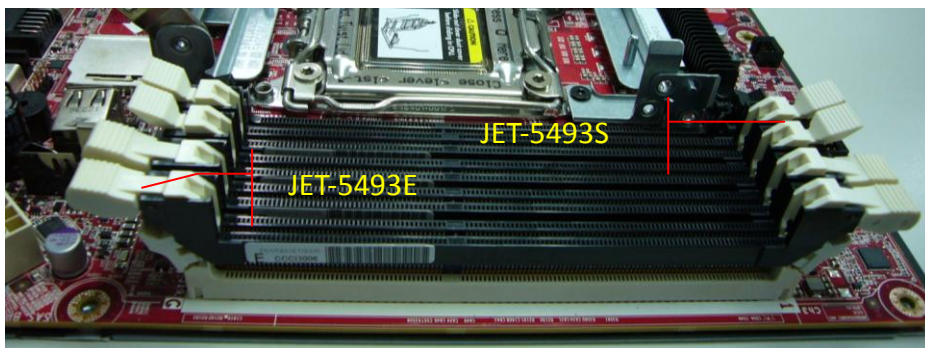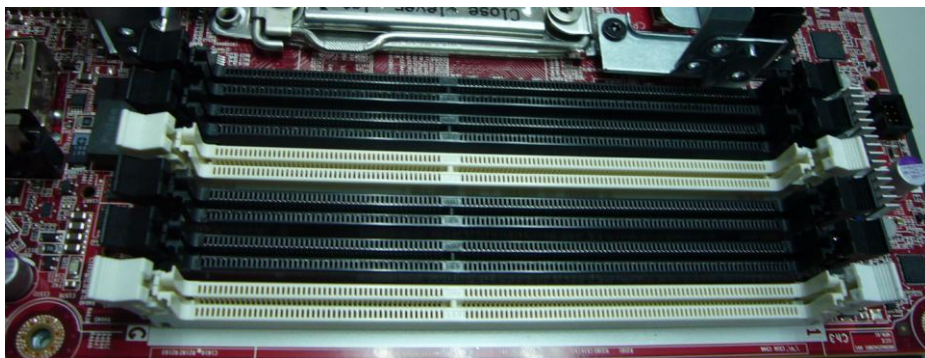

Both JET-5493E and JET-5493S designed to minimize the signal degradation effects of the extender by proven design techniques.